

Multi-Agent Motion Planning and Object Transportation under High Level Goals [★]

Christos K. Verginis^{*} Dimos V. Dimarogonas^{*}

^{*} *KTH Royal Institute of Technology, Stockholm, CO 10044 Sweden
(e-mail: {cverginis, dimos}@kth.se)*

Abstract: This paper presents a hybrid control framework for the motion planning of a multi-agent system including N robotic agents and M objects, under high level goals. In particular, we design control protocols that allow the transition of the agents as well as the transportation of the objects by the agents, among predefined regions of interest in the workspace. This allows us to abstract the coupled behavior of the agents and the objects as a finite transition system and to design a high-level multi-agent plan that satisfies the agents' and the objects' specifications, given as temporal logic formulas. Simulation results verify the proposed framework.

Keywords: Multi-agent systems, Robotic manipulators, Cooperative navigation, Nonlinear cooperative control, Temporal logics.

1. INTRODUCTION

Temporal-logic based motion planning has gained significant amount of attention over the last decade, as it provides a fully automated correct-by-design controller synthesis approach for autonomous robots. Temporal logics, such as linear temporal logic (LTL), provide formal high-level languages that can describe planning objectives more complex than the well-studied navigation algorithms, and have been used extensively both in single- as well as in multi-agent setups (Fainekos et al., 2009; Lahijanian et al., 2016; Loizou and Kyriakopoulos, 2004; Diaz-Mercado et al., 2015; Chen et al., 2012; Cowlagi and Zhang, 2016; Belta et al., 2005; Bhatia et al., 2010, 2011; Filippidis et al., 2012; Guo and Dimarogonas, 2015).

Most works in the related literature consider temporal logic-based motion planning for fully actuated, autonomous agents. Consider, however, cases where some unactuated objects must undergo a series of processes in a workspace with autonomous agents (e.g., car factories). In such cases, the agents, except for satisfying their own motion specifications, are also responsible for coordinating with each other in order to transport the objects around the workspace. When the unactuated objects' specifications are expressed using temporal logics, then the abstraction of the agents' behavior becomes much more complex, since it has to take into account the objects' goals.

Another issue regarding the temporal logic-based planning in the related literature is the non-realistic assumptions that are often considered. In particular, many works either do not take into account continuous agent dynamics or adopt single or double integrators (Loizou and Kyriakopoulos, 2004; Filippidis et al., 2012; Fainekos et al.,

2009; Bhatia et al., 2011; Guo and Dimarogonas, 2015), which can deviate from the actual dynamics of the agents, leading thus to poor performance in real-life scenarios. Moreover, many works adopt dimensionless point-mass agents and therefore do not consider inter-agent collision avoidance (Belta et al., 2005; Filippidis et al., 2012; Guo and Dimarogonas, 2015), which can be a crucial safety issue in applications involving autonomous robots.

This paper presents a novel hybrid control framework for the motion planning of a team of N autonomous agents and M unactuated objects under LTL specifications. We design feedback control laws for i) the navigation of the agents and ii) the transportation of the objects by the agents, among predefined regions of interest in the workspace, while ensuring inter-agent collision avoidance. This allows us to model the coupled behavior of the agents and the objects with a finite transition system, which can be used for the design of high-level plans that satisfy the given LTL specifications.

2. NOTATION AND PRELIMINARIES

Vectors and matrices are denoted with bold lowercase and uppercase letters, respectively, whereas scalars are denoted with non-bold lowercase letters. The set of positive integers is denoted as \mathbb{N} and the real n -space, with $n \in \mathbb{N}$, as \mathbb{R}^n ; $\mathbb{R}_{\geq 0}^n$ and $\mathbb{R}_{> 0}^n$ are the sets of real n -vectors with all elements nonnegative and positive, respectively, and \mathbb{T}^n is the n -D torus. Given a set S , 2^S is the set of all possible subsets of S , $|S|$ is its cardinality, and, given a finite sequence s_1, \dots, s_n of elements in S , with $n \in \mathbb{N}$, we denote by $(s_1, \dots, s_n)^\omega$ the infinite sequence $s_1, \dots, s_n, s_1, \dots, s_n, s_1, \dots$ created by repeating s_1, \dots, s_n . The notation $\|\mathbf{y}\|$ is used for the Euclidean norm of a vector $\mathbf{y} \in \mathbb{R}^n$. Given $x \in \mathbb{R}$ and $\mathbf{y}, \mathbf{z} \in \mathbb{R}^n$, we use $\nabla_{\mathbf{z}} x = \partial x / \partial \mathbf{z} \in \mathbb{R}^n$ and $\nabla_{\mathbf{z}} \mathbf{y} = \partial \mathbf{y} / \partial \mathbf{z} \in \mathbb{R}^{n \times n}$; $\mathcal{B}_r(\mathbf{c})$ denotes the ball of radius $r \in \mathbb{R}_{> 0}$ and center $\mathbf{c} \in \mathbb{R}^3$. Finally, we use $\mathcal{N} = \{1, \dots, N\}$, $\mathcal{M} = \{1, \dots, M\}$, $\mathcal{K} = \{1, \dots, K\}$, with $N, M, K \in \mathbb{N}$, as well as $\mathbb{M} = \mathbb{R}^3 \times \mathbb{T}^3$.

[★] This work was supported by the H2020 ERC Starting Grand BUCOPHSYS, the Swedish Research Council (VR), the Knut och Alice Wallenberg Foundation and the European Union's Horizon 2020 Research and Innovation Programme under the Grant Agreement No. 644128 (AEROWORKS).




Fig. 1. A robotic agent consisting of $\mathbf{p}_i = 3$ rigid bodies, with $\mathfrak{R}_1^i = 21$ and $\mathfrak{R}_2^i = \mathfrak{R}_3^i = 4$ ellipsoids.

We focus on the task specification ϕ given as a Linear Temporal Logic (LTL) formula. The basic ingredients of a LTL formula are a set of atomic propositions \mathcal{AP} and several boolean and temporal operators. LTL formulas are formed according to the following grammar (Baier et al., 2008): $\phi ::= \text{true} \mid a \mid \phi_1 \wedge \phi_2 \mid \neg\phi \mid \bigcirc\phi \mid \phi_1 \cup \phi_2$, where $a \in \mathcal{AP}$ and \bigcirc (next), \cup (until). Definitions of other useful operators like \square (always), \diamond (eventually) and \Rightarrow (implication) are omitted and can be found at (Baier et al., 2008). The semantics of LTL are defined over infinite words over $2^{\mathcal{AP}}$. Intuitively, an atomic proposition $\psi \in \mathcal{AP}$ is satisfied on a word $w = w_1 w_2 \dots$ if it holds at its first position w_1 , i.e. $\psi \in w_1$. Formula $\bigcirc\phi$ holds true if ϕ is satisfied on the word suffix that begins in the next position w_2 , whereas $\phi_1 \cup \phi_2$ states that ϕ_1 has to be true until ϕ_2 becomes true. Finally, $\diamond\phi$ and $\square\phi$ holds on w eventually and always, respectively. For a full definition of the LTL semantics, the reader is referred to (Baier et al., 2008).

3. SYSTEM MODEL AND PROBLEM FORMULATION

Consider N robotic agents operating in a workspace \mathcal{W} with M objects; \mathcal{W} is a bounded sphere in 3D space, i.e., $\mathcal{W} = \mathcal{B}_{r_0}(\mathbf{p}_0) = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } \|\mathbf{p} - \mathbf{p}_0\| \leq r_0\}$, where $\mathbf{p}_0 \in \mathbb{R}^3$ and $r_0 \in \mathbb{R}_{>0}$ are the center and radius, respectively, of \mathcal{W} . The objects are represented by rigid bodies whereas the robotic agents are fully actuated and consist of a moving part (i.e., mobile base) and a robotic arm, having, therefore, access to the entire workspace. Within \mathcal{W} there exist K smaller spheres around points of interest, which are described by $\pi_k = \mathcal{B}_{r_k}(\mathbf{p}_{\pi_k}) = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } \|\mathbf{p} - \mathbf{p}_{\pi_k}\| \leq r_k\}$, where $\mathbf{p}_{\pi_k} \in \mathbb{R}^3$ is the center and $r_k \in \mathbb{R}_{>0}$ the radius of π_k . The boundary of region π_k is $\partial\pi_k = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } \|\mathbf{p} - \mathbf{p}_{\pi_k}\| = r_k\}$. We denote the set of all π_k as $\Pi = \{\pi_1, \dots, \pi_K\}$. For the workspace partition to be valid, we consider that the regions of interest are sufficiently distant from each other and from the workspace boundary, i.e., $\|\mathbf{p}_{\pi_k} - \mathbf{p}_{\pi_{k'}}\| > 4 \max_{l \in \mathcal{K}} \{r_{\pi_l}\}$ and $\|\mathbf{p}_{\pi_k} - \mathbf{p}_0\| < r_0 - 3r_{\pi_k}, \forall k, k' \in \mathcal{K}$ with $k \neq k'$. Moreover, we introduce disjoint sets of atomic propositions Ψ_i, Ψ_{o_j} , expressed as boolean variables, that represent services provided to agent $i \in \mathcal{N}$ and object $j \in \mathcal{M}$ in Π . The services provided at each region π_k are given by the labeling functions $\mathcal{L}_i : \Pi \rightarrow 2^{\Psi_i}, \mathcal{L}_{o_j} : \Pi \rightarrow 2^{\Psi_{o_j}}$, which assign to each region $\pi_k, k \in \mathcal{K}$, the subset of services Ψ_i and Ψ_{o_j} , respectively, that can be provided in that region to agent $i \in \mathcal{N}$ and object $j \in \mathcal{M}$, respectively.

3.1 System Model

We denote by $\mathbf{q}_i : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}^{n_i}, i \in \mathcal{N}$ the generalized joint variables of the i th agent, and $\mathbf{q} = [[\mathbf{q}_i^T]_{i \in \mathcal{N}}]^T \in \mathbb{R}^n$,

with $n = \sum_{i \in \mathcal{N}} n_i$. We also denote as $\mathbf{p}_i : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}^3$ the position of the i th agent's end-effector derived from the forward kinematics (Siciliano et al., 2010), expressed in an inertial frame of reference. The differential kinematics of agent i suggest that $\mathbf{v}_i(t) = \mathbf{J}_i(\mathbf{q}_i(t))\dot{\mathbf{q}}_i(t)$, where $\mathbf{J}_i : \mathbb{R}^{n_i} \rightarrow \mathbb{R}^{6 \times n_i}$ is the Jacobian matrix and $\mathbf{v}_i : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}^6$, with $\mathbf{v}_i(t) = [\dot{\mathbf{p}}_i^T(t), \boldsymbol{\omega}_i^T(t)]^T$, is the velocity of the end-effector, with $\boldsymbol{\omega}_i : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}^3$ being its angular velocity with respect to (and expressed in) an inertial frame. The joint-space dynamics of agent i are given by (Siciliano et al., 2010):

$$\mathbf{B}_i(\mathbf{q}_i)\ddot{\mathbf{q}}_i + \mathbf{N}_i(\mathbf{q}_i, \dot{\mathbf{q}}_i)\dot{\mathbf{q}}_i + \mathbf{g}_i(\mathbf{q}_i) = \boldsymbol{\tau}_i - \mathbf{J}_i^T(\mathbf{q}_i)\mathbf{f}_i, \quad (1)$$

where $\mathbf{B}_i : \mathbb{R}^{n_i} \rightarrow \mathbb{R}^{n_i \times n_i}$ is the positive definite inertia matrix, $\mathbf{N}_i : \mathbb{R}^{n_i} \times \mathbb{R}^{n_i} \rightarrow \mathbb{R}^{n_i \times n_i}$ is the Coriolis matrix, $\mathbf{g}_i : \mathbb{R}^{n_i} \rightarrow \mathbb{R}^{n_i}$ is the joint space gravity vector, $\boldsymbol{\tau}_i \in \mathbb{R}^{n_i}$ is the vector of joint torques and $\mathbf{f}_i \in \mathbb{R}^6$ is the vector of generalized forces that the end-effector exerts on a surface, in case of contact, $\forall i \in \mathcal{N}$.

We consider that each agent $i \in \mathcal{N}$ consists of \mathbf{p}_i rigid bodies $r_p^i, p \in \bar{\mathbf{p}}_i$, where $\bar{\mathbf{p}}_i = \{1, \dots, \mathbf{p}_i\}$ is the corresponding index set, whose volume R_p^i is approximated by the union of \mathfrak{R}_p^i generalized ellipsoids $R_{p,e}^i$, i.e., $R_p^i = \bigcup_{e \in \bar{\mathfrak{R}}_p^i} R_{p,e}^i$ with $\bar{\mathfrak{R}}_p^i = \{1, \dots, \mathfrak{R}_p^i\}$. An example of the aforementioned formulation is illustrated in Fig. 1. By denoting the principal semi-axes lengths of $R_{p,e}^i$ as $a_{p,e}^i, b_{p,e}^i, c_{p,e}^i$, we define the function $\lambda_{p,e}^i : \mathbb{R}^3 \times \mathbb{R}^{n_i} \rightarrow \mathbb{R}$ that describes $R_{p,e}^i$ as

$$\lambda_{p,e}^i(\mathbf{p}^*, \mathbf{q}_i) = (\mathbf{p}^*)^T (\text{diag}\{a_{p,e}^i, b_{p,e}^i, c_{p,e}^i\})^{-1} \mathbf{p}^* - 1, \quad (2)$$

where $\mathbf{p}^* \in \mathbb{R}^3$ is a 3D vector expressed in a local frame at the center of $R_{p,e}^i$, aligned with its principal axes, whose orientation depends on \mathbf{q}_i . We denote the solutions of (2) as $\Omega_{p,e}^{i,*}(\mathbf{q}_i) = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } \lambda_{p,e}^i(\mathbf{p}, \mathbf{q}_i) = 0\}$. We also denote as $\Omega^{i,*}(\mathbf{q}_i) = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } (\exists e \in \bar{\mathfrak{R}}_p^i, p \in \bar{\mathbf{p}}_i \text{ s.t. } \lambda_{p,e}^i(\mathbf{p}, \mathbf{q}_i) = 0)\}$, i.e., the set of solutions for all ellipsoids that approximate the volume of agent $i \in \mathcal{N}$.

Similarly to the robotic agents, we denote as $\mathbf{p}_{o_j} : \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}^3, \boldsymbol{\eta}_{o_j} : \mathbb{R}_{\geq 0} \rightarrow \mathbb{T}^3$, the position and Euler-angle orientation of object $j \in \mathcal{M}$, which obeys the second order dynamics:

$$\mathbf{M}_{o_j}(\mathbf{x}_{o_j})\ddot{\mathbf{x}}_{o_j} + \mathbf{C}_{o_j}(\mathbf{x}_{o_j}, \dot{\mathbf{x}}_{o_j})\dot{\mathbf{x}}_{o_j} + \mathbf{g}_{o_j}(\mathbf{x}_{o_j}) = \mathbf{f}_{o_j}, \quad (3)$$

where $\mathbf{x}_{o_j} = [\mathbf{p}_{o_j}^T, \boldsymbol{\eta}_{o_j}^T]^T \in \mathbb{M}, \mathbf{v}_{o_j} = [\dot{\mathbf{p}}_{o_j}^T, \dot{\boldsymbol{\eta}}_{o_j}^T]^T \in \mathbb{R}^6, \mathbf{M}_{o_j} : \mathbb{M} \rightarrow \mathbb{R}^{6 \times 6}$ is the positive definite inertia matrix, $\mathbf{C}_{o_j} : \mathbb{M} \times \mathbb{R}^6 \rightarrow \mathbb{R}^{6 \times 6}$ and $\mathbf{g}_{o_j} : \mathbb{M} \rightarrow \mathbb{R}^6$ are the Coriolis and gravity terms, respectively, and $\mathbf{f}_{o_j} \in \mathbb{R}^6$ is the vector of generalized forces acting on the object's center of mass. In case of a rigid grasp between agent i and object j , \mathbf{f}_i and \mathbf{f}_{o_j} are related through $\mathbf{f}_i = \mathbf{G}_{i,j}(\mathbf{q}_i)\mathbf{f}_{o_j}$, where $\mathbf{G}_{i,j} : \mathbb{R}^{n_i} \rightarrow \mathbb{R}^{6 \times 6}$ is the full-rank grasp matrix. The aforementioned inertia and Coriolis matrices satisfy the skew-symmetric property (Siciliano et al., 2010):

$$\dot{\mathbf{B}}_i - 2\mathbf{N}_i = -(\dot{\mathbf{B}}_i - 2\mathbf{N}_i)^T, \quad (4a)$$

$$\dot{\mathbf{M}}_{o_j} - 2\mathbf{C}_{o_j} = -(\dot{\mathbf{M}}_{o_j} - 2\mathbf{C}_{o_j})^T, \quad (4b)$$

$\forall i \in \mathcal{N}, j \in \mathcal{M}$. Object j is a rigid body r_o^j and therefore we approximate its volume R_o^j by a union of \mathfrak{R}_o^j ellipsoids, i.e., $R_o^j = \bigcup_{e \in \bar{\mathfrak{R}}_o^j} R_{o,e}^j$ with $\bar{\mathfrak{R}}_o^j = \{1, \dots, \mathfrak{R}_o^j\}$ and $R_{o,e}^j$ described by the functions $\lambda_{o,e}^j(\mathbf{x}_{o_j}, \mathbf{p}^*) =$

$(\mathbf{p}^*)^T (\text{diag}\{a_{o,e}^j, b_{o,e}^j, c_{o,e}^j\})^{-1} \mathbf{p}^* - 1$, where $a_{o,e}^j, b_{o,e}^j, c_{o,e}^j$ are the semi-axes lengths and $\mathbf{p}^* \in \mathbb{R}^3$ is a 3D vector expressed in a local frame at the center of $R_{o,e}^j$, aligned with its principal axes. Also, we denote $\Omega_{o,e}^{j,*}(\mathbf{x}_{o_j}) = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } \lambda_{o,e}^j(\mathbf{x}_{o_j}, \mathbf{p}) = 0\}$ and $\Omega_o^{j,*}(\mathbf{x}_{o_j}) = \{\mathbf{p} \in \mathbb{R}^3 \text{ s.t. } (\exists e \in \mathfrak{X}_o^j \text{ s.t. } \lambda_{o,e}^j(\mathbf{x}_{o_j}, \mathbf{p}) = 0)\}$.

We can now provide the following definitions:

Definition 1. Agent $i \in \mathcal{N}$ is in region $\pi_k, k \in \mathcal{K}$, at a configuration \mathbf{q}_i , denoted as $\mathcal{A}_i(\mathbf{q}_i) \in \pi_k$, iff $\|\mathbf{p} - \mathbf{p}_k\| \leq r_k - \varepsilon, \forall \mathbf{p} \in \Omega^{i,*}(\mathbf{q}_i)$, with $\varepsilon > 0$ arbitrarily small.

Definition 2. Object $j \in \mathcal{M}$ is in region $\pi_k, k \in \mathcal{K}$, at a configuration \mathbf{x}_{o_j} , denoted as $\mathcal{O}_j(\mathbf{x}_{o_j}) \in \pi_k$, iff $\|\mathbf{p} - \mathbf{p}_k\| \leq r_k - \varepsilon, \forall \mathbf{p} \in \Omega_o^{j,*}(\mathbf{x}_{o_j})$, with $\varepsilon > 0$ arbitrarily small.

In the following, we use the notation $\Omega^{i,*}(\mathbf{q}_i(t_0)) \cap \Omega^{i',*}(\mathbf{q}_{i'}(t_0)) = \emptyset$, $\Omega^{i,*}(\mathbf{q}_i(t_0)) \cap \Omega_o^{j,*}(\mathbf{x}_{o_j}(t_0)) = \emptyset$, and $\Omega_o^{j,*}(\mathbf{x}_{o_j}(t_0)) \cap \Omega_o^{j',*}(\mathbf{x}_{o_{j'}}(t_0)) = \emptyset, i, i' \in \mathcal{N}, j, j' \in \mathcal{M}$, with $i \neq i', j \neq j'$, to describe collision-free cases at t_0 between the agents and the objects.

In order for our workspace discretization to be valid, we need the following assumption:

Assumption 1. There exist $\mathbf{q}_i^k, \mathbf{x}_{o_j}^k$ s. t. $\mathcal{A}(\mathbf{q}_i^k), \mathcal{O}(\mathbf{x}_{o_j}^k) \in \pi_k$ and $\Omega^{i,*}(\mathbf{q}_i^k) \cap \Omega_o^{j,*}(\mathbf{x}_{o_j}^k) = \emptyset, \forall i \in \mathcal{N}, j \in \mathcal{M}, k \in \mathcal{K}$.

The aforementioned assumption implies that all regions of interest are sufficiently large to contain an object along with an agent, in a collision-free configuration.

We also use the boolean variable $\mathcal{AG}_{i,j}(t^*)$ to denote whether agent $i \in \mathcal{N}$ rigidly grasps an object $j \in \mathcal{M}$ at the time instant t^* ; $\mathcal{AG}_{i,0}(t^*) = \top$ denotes that agent i does not grasp any object. Note that $\mathcal{AG}_{i,\ell}(t^*) = \top, \ell \in \{0\} \cup \mathcal{M} \Leftrightarrow \mathcal{AG}_{i,j}(t^*) = \perp, \forall j \in \{0\} \cup \mathcal{M} \setminus \{\ell\}$ (i.e., agent i can grasp at most one object at a time) and $\Omega^{i,*}(\mathbf{q}_i(t^*)) \cap \Omega_o^{j,*}(\mathbf{x}_{o_j}(t^*)) = \emptyset, \forall j \in \mathcal{M}, \Rightarrow \mathcal{AG}_{i,0}(t) = \top$. The following definitions address the transitions of the agents and the objects between the regions of interest.

Definition 3. Assume for agent $i \in \mathcal{N}$ that $\mathcal{A}_i(\mathbf{q}_i(t_0)) \in \pi_k, k \in \mathcal{K}$, and

$$(i) \Omega^{i,*}(\mathbf{q}_i(t_0)) \cap \left(\Omega_o^{j,*}(\mathbf{x}_{o_j}(t_0)) \cup \Omega^{n,*}(\mathbf{q}_n(t_0)) \right) = \emptyset,$$

$\forall j \in \mathcal{M}, n \in \mathcal{N} \setminus \{i\}$, for some $t_0 \in \mathbb{R}_{\geq 0}$. Then, there exists a transition for agent i from region π_k to $\pi_{k'}, k' \in \mathcal{K}$, denoted as $\pi_k \rightarrow_i \pi_{k'}$, iff there exists a finite $t_f \in \mathbb{R}_{\geq 0}$ with $t_f \geq t_0$ and a bounded control trajectory $\tau_i : [t_0, t_f] \rightarrow \mathbb{R}^{n_i}$ such that $\mathcal{A}_i(\mathbf{q}_i(t_f)) \in \pi_{k'}$ and

$$\Omega^{i,*}(\mathbf{q}_i(t)) \cap (\partial\pi_m \cup \Omega^{n,*}(\mathbf{q}_n(t)) \cup \Omega_o^{j,*}(\mathbf{x}_{o_j}(t))) = \emptyset,$$

$\forall t \in [t_0, t_f], j \in \mathcal{M}, n \in \mathcal{N} \setminus \{i\}, m \in \mathcal{K} \setminus \{k, k'\}$.

Definition 4. Assume for agent $i \in \mathcal{N}$ and object $j \in \mathcal{M}$ that $\mathcal{A}_i(\mathbf{q}_i(t_0)), \mathcal{O}_j(\mathbf{x}_{o_j}(t_0)) \in \pi_k, k \in \mathcal{K}$, and

$$(i) \Omega^{i,*}(\mathbf{q}_i(t_0)) \cap \left(\Omega_o^{j',*}(\mathbf{x}_{o_{j'}}(t_0)) \cup \Omega^{n,*}(\mathbf{q}_n(t_0)) \right) = \emptyset,$$

$$(ii) \Omega_o^{j,*}(\mathbf{x}_{o_j}(t_0)) \cap \left(\Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t_0)) \cup \Omega^{i',*}(\mathbf{q}_{i'}(t_0)) \right) = \emptyset,$$

$\forall \ell \in \mathcal{M} \setminus \{j\}, n \in \mathcal{N} \setminus \{i\}, j' \in \mathcal{M}, i' \in \mathcal{N}$, for some $t_0 \in \mathbb{R}_{\geq 0}$. Then, agent i grasps object j at region π_k , denoted

as $i \xrightarrow{g} j$, iff there exists a finite $t_f \in \mathbb{R}_{\geq 0}$ with $t_f \geq t_0$ and a bounded control trajectory $\tau_i : [t_0, t_f] \rightarrow \mathbb{R}^{n_i}$ such that $\mathcal{AG}_{i,j}(t_f) = \top, \mathcal{A}_i(\mathbf{q}_i(t)), \mathcal{O}_j(\mathbf{x}_{o_j}(t)) \in \pi_k$ and

$$(i) \Omega^{i,*}(\mathbf{q}_i(t)) \cap \left(\Omega^{n,*}(\mathbf{q}_n(t)) \cup \Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t)) \right) = \emptyset,$$

$$(ii) \Omega_o^{j,*}(\mathbf{x}_{o_j}(t)) \cap \left(\Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t)) \cup \Omega^{n,*}(\mathbf{q}_n(t)) \right) = \emptyset,$$

$\forall t \in [t_0, t_f], n \in \mathcal{N} \setminus \{i\}, \ell \in \mathcal{M} \setminus \{j\}$.

The action of an agent *releasing* a rigid grasp with an object at a region, denoted as $i \xrightarrow{r} j$, is defined similarly and is omitted.

Definition 5. Assume for agent $i \in \mathcal{N}$ and object $j \in \mathcal{M}$ that $\mathcal{A}_i(\mathbf{q}_i(t_0)), \mathcal{O}_j(\mathbf{x}_{o_j}(t_0)) \in \pi_k, k \in \mathcal{K}$, with $\mathcal{AG}_{i,j}(t_0) = \top$ and

$$(i) \Omega^{i,*}(\mathbf{q}_i(t_0)) \cap \left(\Omega^{n,*}(\mathbf{q}_n(t_0)) \cup \Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t_0)) \right) = \emptyset.$$

$$(ii) \Omega_o^{j,*}(\mathbf{x}_{o_j}(t_0)) \cap \left(\Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t_0)) \cup \Omega^{n,*}(\mathbf{q}_n(t_0)) \right) = \emptyset,$$

$\forall n \in \mathcal{N} \setminus \{i\}, \ell \in \mathcal{M} \setminus \{j\}$ for some $t_0 \in \mathbb{R}_{\geq 0}$. Then, agent i transports object j from region π_k to region $\pi_{k'}, k' \in \mathcal{K}$, denoted as $\pi_k \xrightarrow{T}_{i,j} \pi_{k'}$, if there exists a finite $t_f \in \mathbb{R}_{\geq 0}$ with $t_f \geq t_0$ and a bounded control trajectory $\tau_i : [t_0, t_f] \rightarrow \mathbb{R}^{n_i}$ such that $\mathcal{A}_i(\mathbf{q}_i(t_f)), \mathcal{O}_j(\mathbf{x}_{o_j}(t_f)) \in \pi_{k'}$, $\mathcal{AG}_{i,j}(t) = \top$, and

$$(i) \left(\Omega^{i,*}(\mathbf{q}_i(t)) \cup \Omega_o^{j,*}(\mathbf{x}_{o_j}(t)) \right) \cap \partial\pi_m = \emptyset,$$

$$(ii) \Omega^{i,*}(\mathbf{q}_i(t)) \cap \left(\Omega^{n,*}(\mathbf{q}_n(t)) \cup \Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t)) \right) = \emptyset,$$

$$(iii) \Omega_o^{j,*}(\mathbf{x}_{o_j}(t)) \cap \left(\Omega_o^{\ell,*}(\mathbf{x}_{o_\ell}(t)) \cup \Omega^{n,*}(\mathbf{q}_n(t)) \right) = \emptyset,$$

$\forall t \in [t_0, t_f], n \in \mathcal{N} \setminus \{i\}, \ell \in \mathcal{M} \setminus \{j\}, m \in \mathcal{K} \setminus \{k, k'\}$.

3.2 Specification

Our goal is to control the multi-agent system such that the agents and the objects obey a given specification over their atomic propositions $\Psi_i, \Psi_{o_j}, \forall i \in \mathcal{N}, j \in \mathcal{M}$. Given the trajectories $\mathbf{q}_i(t), \mathbf{x}_{o_j}(t), t \in \mathbb{R}_{\geq 0}$, of agent i and object j , respectively, their corresponding *behaviors* are given by the infinite sequences $\beta_i = (\mathbf{q}_i(t), \sigma_i) = (\mathbf{q}_i(t_{i_1}), \sigma_{i_1})(\mathbf{q}_i(t_{i_2}), \sigma_{i_2}) \dots, \beta_{o_j} = (\mathbf{x}_{o_j}(t), \sigma_{o_j}) = (\mathbf{x}_{o_j}(t_{o_{j,1}}), \sigma_{o_{j,1}})(\mathbf{x}_{o_j}(t_{o_{j,2}}), \sigma_{o_{j,2}}) \dots$ with $t_{i_{m+1}} > t_{i_m} \geq 0, t_{o_{j,m+1}} > t_{o_{j,m}} \geq 0, \forall m \in \mathbb{N}$. The sequences σ_i, σ_{o_j} are the services provided to the agent and the object, respectively, over their trajectories, i.e., $\sigma_{i_m} \in 2^{\Psi_i}, \sigma_{o_{j,l}} \in 2^{\Psi_{o_j}}$ with $\mathcal{A}_i(\mathbf{q}_i(t_{i_m})) \in \pi_{k_m}, \sigma_{i_m} \in \mathcal{L}_i(\pi_{k_m})$ and $\mathcal{O}_j(\mathbf{x}_{o_j}(t_{o_{j,l}})) \in \pi_{k_l}, \sigma_{o_{j,l}} \in \mathcal{L}_{o_j}(\pi_{k_l}), k_m, k_l \in \mathcal{K}, \forall m, l \in \mathbb{N}$, with \mathcal{L}_i and \mathcal{L}_{o_j} as defined in Section 3.

Definition 6. The behaviors β_i, β_{o_j} satisfy formulas ϕ_i, ϕ_{o_j} iff $\sigma_i \models \phi_i$ and $\sigma_{o_j} \models \phi_{o_j}$, respectively.

3.3 Problem Formulation

The control objectives are given as LTL formulas ϕ_i, ϕ_{o_j} over Ψ_i, Ψ_{o_j} , respectively, $\forall i \in \mathcal{N}, j \in \mathcal{M}$. The LTL formulas ϕ_i, ϕ_{o_j} are satisfied if there exist behaviors β_i, β_{o_j} of agent i and object j that satisfy ϕ_i, ϕ_{o_j} . Formally, the problem treated in this paper is the following:

Problem 1. Consider N robotic agents and M objects in \mathcal{W} subject to the dynamics (1) and (3), respectively, and (i) $\Omega^{i,*}(\mathbf{q}_i(0)) \cap \Omega_j^{j,*}(\mathbf{x}_{O_j}(0)) = \emptyset$, (ii) $\dot{\mathbf{q}}_i(0) = \mathbf{0}, \forall i \in \mathcal{N}$, (iii) $\mathcal{A}_i(\mathbf{q}_i(0)) \in \pi_{i_0}, \mathcal{O}_j(\mathbf{x}_{O_j}(0)) \in \pi_{O_{j,0}}$, with $i_0, O_{j,0} \in \mathcal{K}$ and $i_0 \neq n_0, O_{j,0} \neq O_{\ell,0}, \forall i, n \in \mathcal{N}, j, \ell \in \mathcal{M}$ with $i \neq n, j \neq \ell$. Given the disjoint set Ψ_i, Ψ_{O_j} , N LTL formulas ϕ_i over Ψ_i and M LTL formulas ϕ_{O_j} over Ψ_{O_j} , develop a control strategy that achieves behaviors β_i, β_{O_j} which yield the satisfaction of $\phi_i, \phi_{O_j}, \forall i \in \mathcal{N}, j \in \mathcal{M}$.

4. MAIN RESULTS

4.1 Continuous Control Design

The first ingredient of our solution is the development of feedback control laws that establish agent transitions and object transportations as defined in Def. 3 and 5, respectively. Regarding the grasping actions of Def. 4, we employ one of the already existing methodologies that can derive the corresponding control laws (e.g., (Cutkosky, 2012), (Reis et al., 2015)).

Transformation to Point World: In this work we employ the algorithm proposed in (Tanner et al., 2003) to create point worlds. In particular, there exists a sequence of smooth transformations on the rigid body ellipsoids, introduced in Section 3, that creates spaces where the robotic agents and the objects are represented by points. Since 3D spheres are a special case of 3D ellipsoids, we also consider the regions of interest as obstacles that will be transformed to points. For details on the transformation, the reader is referred to (Tanner et al., 2003).

Assume that the conditions of Problem 1 hold for some $t_0 \in \mathbb{R}_{\geq 0}$, i.e., all agents and objects are located in regions of interest and there is no more than one agent or one object at the same region. We design a control law such that a subset of agents performs a transition between two regions of interest and another subset of agents performs object transportation, according to Def. 3 and 5, respectively. Let $\mathcal{Z}, \mathcal{V}, \mathcal{G}, \mathcal{Q} \subseteq \mathcal{N}$ denote disjoint sets of agents corresponding to transition, transportation, grasping and releasing actions, respectively, with $|\mathcal{V}| + |\mathcal{G}| + |\mathcal{Q}| \leq |\mathcal{M}|$ and $\mathcal{A}_z(\mathbf{q}_z(t_0)) \in \pi_{k_z}, \mathcal{A}_v(\mathbf{q}_v(t_0)) \in \pi_{k_v}, \mathcal{A}_g(\mathbf{q}_g(t_0)) \in \pi_{k_g}, \mathcal{A}_q(\mathbf{q}_q(t_0)) \in \pi_{k_q}, k_z, k_v, k_g, k_q \in \mathcal{K}, \forall z \in \mathcal{Z}, v \in \mathcal{V}, g \in \mathcal{G}, q \in \mathcal{Q}$. Note that there might be idle agents in some regions, not performing any actions, i.e., $\mathcal{Z} \cup \mathcal{V} \cup \mathcal{G} \cup \mathcal{Q} \subseteq \mathcal{N}$. Let also $\mathcal{S} = \{[s_v]_{v \in \mathcal{V}}\}, \mathcal{X} = \{[x_g]_{g \in \mathcal{G}}\}, \mathcal{Y} = \{[y_q]_{q \in \mathcal{Q}}\} \subseteq \mathcal{M}$ such that $\mathcal{O}_{s_v}(\mathbf{x}_{O_{s_v}}(t_0)) \in \pi_{k_v}, \mathcal{O}_{x_g}(\mathbf{x}_{O_{x_g}}(t_0)) \in \pi_{k_g}, \mathcal{O}_{y_q}(\mathbf{x}_{O_{y_q}}(t_0)) \in \pi_{k_y}, s_v \in \mathcal{S}, x_g \in \mathcal{X}, y_q \in \mathcal{Y}, \forall v \in \mathcal{V}, g \in \mathcal{G}, q \in \mathcal{Q}$, i.e., there exists one object at each $\pi_{k_v}, \pi_{k_g}, \pi_{k_q}$. Moreover, assume that the conditions of Def. 3 hold for all $z \in \mathcal{Z}$, the conditions of Def. 5 hold for all $v \in \mathcal{V}$ and $s_v \in \mathcal{S}$, the conditions of Def. 4 hold for all $g \in \mathcal{G}$ and $x_g \in \mathcal{X}$, and the corresponding release conditions (which are omitted due to space limitations), hold for all $q \in \mathcal{Q}$ and $y_q \in \mathcal{Y}$. In the following, we design τ_z and τ_v such that $\pi_{k_z} \rightarrow_z \pi_{k'_z}$ and $\pi_{k_v} \xrightarrow{T}_{v, s_v} \pi_{k'_v}, k'_z, k'_v \in \mathcal{K}, \forall z \in \mathcal{Z}, v \in \mathcal{V}$, assuming that there exist appropriate τ_g and τ_q that guarantee $g \xrightarrow{g} x_g$ and $q \xrightarrow{T} y_q$ in π_g, π_q , respectively.

Regarding the transitions $\pi_{k_z} \rightarrow \pi_{k'_z}$ by agents $z \in \mathcal{Z}$, we define the error function $\gamma_{z, k'_z} : \mathbb{R}^{n_z} \rightarrow \mathbb{R}_{\geq 0}$ with $\gamma_{z, k'_z}(\mathbf{q}_z) = \|\mathbf{p}_z(\mathbf{q}_z) - \mathbf{p}_{\pi_{k'_z}}\|^2$.

Regarding the transportations $\pi_{k_v} \xrightarrow{T}_{v, s_v} \pi_{k'_v}$ of the objects $s_v \in \mathcal{S}$ by agents $v \in \mathcal{V}$, note first that a rigid grasp between agent v and object s_v creates a continuous dependence of $\mathbf{x}_{O_{s_v}}$ on \mathbf{q}_v . Therefore, we can write $\mathbf{p}_{O_{s_v}}(t) = \mathbf{k}_{v, s_v}(\mathbf{q}_v(t))$, where $\mathbf{k}_{v, s_v} : \mathbb{R}^{n_v} \rightarrow \mathbb{R}^3$ can be considered as the forward kinematics to the object's center of mass. Therefore, we define the error function $\gamma_{v, k'_v}^{s_v} : \mathbb{R}^{n_v} \rightarrow \mathbb{R}_{\geq 0}$ as $\gamma_{v, k'_v}^{s_v}(\mathbf{q}_v) = \|\mathbf{k}_{v, s_v}(\mathbf{q}_v) - \mathbf{p}_{\pi_{k'_v}}\|^2$.

Each agent should avoid (i) collision with other agents and objects and (ii) entering other regions of interest except from its goal one, both in the transition and transportation actions. Consider the agents $z \in \mathcal{Z}$ and $v \in \mathcal{V}$ performing $\pi_{k_z} \rightarrow_z \pi_{k'_z}$ and $\pi_{k_v} \xrightarrow{T}_{v, s_v} \pi_{k'_v}$, respectively. For each rigid body r_p^z of z , all other rigid bodies $r_{p'}^z, p' \in \bar{\mathbf{p}}_z \setminus \{p\}, r_p^{z'}, p \in \bar{\mathbf{p}}_{z'}, z' \in \mathcal{V} \cup \mathcal{Z} \setminus \{z\}$ and objects $r_o^j, \forall j \in \mathcal{M} \setminus \{\mathcal{X} \cup \mathcal{Y}\}$ as well as the spheres $\mathcal{B}_{r_m}(\mathbf{p}_{\pi_m}), m \in \mathcal{K} \setminus \{k_z, k'_z\}$, are considered as obstacles for r_p^z . In the same vein, for each rigid body r_p^v of v , all other rigid bodies $r_{p'}^v, p' \in \bar{\mathbf{p}}_v \setminus \{p\}, r_p^{v'}, p \in \bar{\mathbf{p}}_{v'}, v' \in \mathcal{V} \cup \mathcal{Z} \setminus \{v\}$ as well as the spheres $\mathcal{B}_{r_m}(\mathbf{p}_{\pi_m}), m \in \mathcal{K} \setminus \{k_v, k'_v\}$, are considered as obstacles for r_p^v . Note that collision avoidance with the set of agents \mathcal{G}, \mathcal{Q} that perform grasp and release actions does not need to be considered, since Def. 4 implies that these agents are contained in π_{k_g}, π_{k_q} during their action and therefore, the avoidance of π_{k_g}, π_{k_q} is sufficient.

Singularity Avoidance: Singularity regions are sets of measure zero within the joint space that depend on the mechanical structure of the agent. The singularity space for agent $i \in \mathcal{N}$ is defined as $Q_i^s = \{\mathbf{q}_i \in \mathbb{R}^{n_i} \text{ s.t. } \det(\mathbf{J}_i^T(\mathbf{q}_i)\mathbf{J}_i(\mathbf{q}_i)) = 0\}$. In well-designed manipulators, singularities can be decoupled to classes that depend on a subset of the joint variables. Therefore, we can enclose these regions inside ellipsoids representing artificial obstacles that affect the motion of the robot end-effector.

Hence, each rigid body r_p^i of agent $i \in \{z, v\}, z \in \mathcal{Z}, v \in \mathcal{V}$ has a number $N_{p, \text{obs}}^i$ obstacles to avoid, including the other rigid bodies, the undesired regions of interest and the singularity ellipsoids, as analyzed above. Then, by employing the point world transformation algorithm of (Tanner et al., 2003), r_p^i is transformed to the point $\mathbf{h}_p^i(\mathbf{q}_i) \in \mathbb{R}^3$ and the obstacles are transformed to the points $\mathbf{h}_{p, o}^{i, \text{obs}}(\tilde{\mathbf{q}}) \in \mathbb{R}^3, \forall o \in \bar{N}_{p, \text{obs}}^i = \{1, \dots, N_{p, \text{obs}}^i\}$, where $\tilde{\mathbf{q}} = [[\mathbf{q}_z^T]_{z \in \mathcal{Z}}, [\mathbf{q}_v^T]_{v \in \mathcal{V}}]^T \in \mathbb{R}^{\tilde{n}}, \tilde{\mathbf{n}} = \sum_{z \in \mathcal{Z}} n_z + \sum_{v \in \mathcal{V}} n_v$.

To form the ‘‘obstacle’’ function, we adopt the notion of proximity relations of (Loizou and Kyriakopoulos, 2006), which are all the possible collision schemes between the aforementioned transformed points. A measure of the distance for each r_p^i and its obstacles is the function $\beta_{p, o}^{i, \text{obs}} : \mathbb{R}^{\tilde{n}} \rightarrow \mathbb{R}_{\geq 0}$ with $\beta_{p, o}^{i, \text{obs}}(\tilde{\mathbf{q}}) = \|\mathbf{h}_p^i(\mathbf{q}_i) - \mathbf{h}_{p, o}^{i, \text{obs}}(\tilde{\mathbf{q}})\|^2, o \in \bar{N}_{p, \text{obs}}^i$. By considering the relation proximity function, which represents the sum of all distance measures in a spe-

cific relation between the transformed points, we can define the relation verification function (RVF), as in (Loizou and Kyriakopoulos, 2006). Then, the total ‘‘obstacle’’ function $\beta_{\text{obs}} : \mathbb{R}^n \rightarrow \mathbb{R}_{\geq 0}$ is the product of the RVFs for all relations and resembles the possible collision schemes between all $r_p^i, i \in \{z, v\}, z \in \mathcal{Z}, v \in \mathcal{V}$, and the corresponding obstacles. For more details on the technique, the reader is referred to (Loizou and Kyriakopoulos, 2006). Regarding the workspace boundaries, we form the function $\delta_{p,e}^i : \mathbb{R}^{n_i} \rightarrow \mathbb{R}_{\geq 0}$ with $\delta_{p,e}^i(\mathbf{q}_i) = (r_0 - \max\{a_{p,e}^i, b_{p,e}^i, c_{p,e}^i\})^2 - \|\mathbf{p}_{R_{p,e}^i}(\mathbf{q}_i) - \mathbf{p}_0\|^2$, that represents an over-approximation of the distance of ellipsoid $R_{p,e}^i$ from the workspace boundary, with $\mathbf{p}_{R_{p,e}^i}$ being the ellipsoid’s center. Then, $\delta^i : \mathbb{R}^{n_i} \rightarrow \mathbb{R}_{\geq 0}$, with $\delta^i(\mathbf{q}_i) = \prod_{p \in \bar{p}_i, e \in \bar{e}_i} \delta_{p,e}^i(\mathbf{q}_i)$, encodes the distance of agent i from the workspace boundaries.

We construct now the following multi-agent navigation function $\varphi : \mathbb{R}^n \rightarrow [0, 1]$ (Rimon and Koditschek, 1992; Loizou and Kyriakopoulos, 2006), that incorporates the desired behavior of the agents:

$$\varphi(\tilde{\mathbf{q}}) = \frac{\gamma(\tilde{\mathbf{q}})}{(\gamma^\kappa(\tilde{\mathbf{q}}) + \beta_{\text{obs}}(\tilde{\mathbf{q}}) \prod_{i \in \mathcal{Z} \cup \mathcal{V}} \delta^i(\mathbf{q}_i))^\frac{1}{\kappa}}, \quad (5)$$

where $\kappa \in \mathbb{R}_{>0}$ and $\gamma : \mathbb{R}^n \rightarrow \mathbb{R}_{\geq 0}$ is defined as $\gamma(\tilde{\mathbf{q}}) = \sum_{z \in \mathcal{Z}} \gamma_{z, k_z}(\mathbf{q}_z) + \sum_{v \in \mathcal{V}} \gamma_{v, k'_v}(\mathbf{q}_v)$. Note that, a sufficient condition for avoidance of the undesired regions and avoidance of collisions and singularities is $\varphi < 1$.

Next, we design the control protocols $\boldsymbol{\tau}_z : [t_0, \infty) \rightarrow \mathbb{R}^{n_z}, \boldsymbol{\tau}_v : [t_0, \infty) \rightarrow \mathbb{R}^{n_v}$:

$$\boldsymbol{\tau}_z(t) = \mathbf{g}_z(\mathbf{q}_z) - \nabla_{\mathbf{q}_z} \varphi(\tilde{\mathbf{q}}) - \mathbf{K}_z \dot{\mathbf{q}}_z(t), \quad (6a)$$

$$\boldsymbol{\tau}_v(t) = \bar{\mathbf{g}}_{v, s_v}(\mathbf{q}_v) - \nabla_{\mathbf{q}_v} \varphi(\tilde{\mathbf{q}}) - \mathbf{K}_v \dot{\mathbf{q}}_v(t), \quad (6b)$$

$\forall z \in \mathcal{Z}, v \in \mathcal{V}$, where $\mathbf{K}_i = \text{diag}\{k_i\} \in \mathbb{R}^{n_i \times n_i}$, with $k_i \in \mathbb{R}_{>0}$, is a constant positive definite gain matrix, $\forall i \in \{z, v\}, z \in \mathcal{Z}, v \in \mathcal{V}$, and

$$\bar{\mathbf{g}}_{i,j} = \mathbf{g}_i + \bar{\mathbf{G}}_{i,j}^T \mathbf{g}_{o_j},$$

is the coupled agent-object gravity vector $\forall i \in \mathcal{N}, j \in \mathcal{M}$. In the same vein, we also define the coupled matrices

$$\bar{\mathbf{B}}_{i,j} = \mathbf{B}_i + \bar{\mathbf{G}}_{i,j}^T \mathbf{M}_{o_j} \bar{\mathbf{G}}_{i,j},$$

$$\bar{\mathbf{N}}_{i,j} = \mathbf{N}_i + \bar{\mathbf{G}}_{i,j}^T \mathbf{M}_{o_j} \dot{\bar{\mathbf{G}}}_{i,j} + (\bar{\mathbf{G}}_{i,j})^T \mathbf{C}_{o_j} \bar{\mathbf{G}}_{i,j},$$

$$\bar{\mathbf{G}}_{i,j} = \mathbf{G}_{i,j}^T \mathbf{J}_i,$$

$\forall i \in \mathcal{N}, j \in \mathcal{M}$. The following Proposition is needed for the subsequent analysis:

Proposition 1. The matrix $\bar{\mathbf{B}}_{i,j}$ is positive definite and the matrix $\dot{\bar{\mathbf{B}}}_{i,j} - 2\dot{\bar{\mathbf{N}}}_{i,j}$ is skew-symmetric, $\forall i \in \mathcal{N}, j \in \mathcal{M}$.

Proof: The positive definiteness of $\bar{\mathbf{B}}_{i,j}$ can be deduced from the positive definiteness of \mathbf{B}_i and \mathbf{M}_{o_j} . Moreover, by defining $\mathbf{A} = \dot{\bar{\mathbf{G}}}_{i,j}^T \mathbf{M}_{o_j} \bar{\mathbf{G}}_{i,j}$, we obtain:

$$\dot{\bar{\mathbf{B}}}_{i,j} - 2\dot{\bar{\mathbf{N}}}_{i,j} = \dot{\mathbf{B}}_i - 2\dot{\mathbf{N}}_i + \dot{\bar{\mathbf{G}}}_{i,j}^T (\mathbf{M}_{o_j} - 2\mathbf{C}_{o_j}) + \mathbf{A} - \mathbf{A}^T,$$

from which, by employing (4), we obtain $(\dot{\bar{\mathbf{B}}}_{i,j} - 2\dot{\bar{\mathbf{N}}}_{i,j})^T = -(\dot{\bar{\mathbf{B}}}_{i,j} - 2\dot{\bar{\mathbf{N}}}_{i,j})$, which completes the proof.

Lemma 1. Consider the sets of agent \mathcal{Z}, \mathcal{V} and the set of objects \mathcal{S} as defined above, described by the dynamics (1) and (3), such that the conditions of Def. 3 hold for all $z \in \mathcal{Z}$ and the conditions of Def. 5 hold for all $v \in \mathcal{V}, s_v \in \mathcal{S}$

for $t_0 = 0, k_z, k_v \in \mathcal{K}$. Then the control protocols (6) guarantee that $\pi_{k_z} \rightarrow_z \pi_{k'_z}$ and $\pi_{k_v} \xrightarrow{T} \pi_{k'_v}, k'_z, k'_v \in \mathcal{K}, \forall z \in \mathcal{Z}, v \in \mathcal{V}$, according to Def. 3 and 5, respectively.

Proof. Regarding the agents $v \in \mathcal{V}$, note that, since $\mathbf{f}_v = \mathbf{G}_{v, s_v}(\mathbf{q}_v) \mathbf{f}_{o_{s_v}}$ owing to the rigid grasp between agent v and object s_v , the kineto-statics duality (Siciliano et al., 2010) suggests that

$$\mathbf{v}_{o_{s_v}}(t) = \mathbf{G}_{v, s_v}^T(\mathbf{q}_v) \mathbf{v}_v(t) = \mathbf{G}_{v, s_v}^T(\mathbf{q}_v) \mathbf{J}_v(\mathbf{q}_v) \dot{\mathbf{q}}_v. \quad (7)$$

By substituting (3) in $\mathbf{f}_v = \mathbf{G}_{v, s_v}(\mathbf{q}_v) \mathbf{f}_{o_{s_v}}$ and using the derivative of (7), we obtain

$$\mathbf{J}_v^T \mathbf{f}_v = \bar{\mathbf{G}}_{v, s_v}^T \mathbf{M}_{o_{s_v}} \bar{\mathbf{G}}_{v, s_v} \ddot{\mathbf{q}}_v + \left(\bar{\mathbf{G}}_{v, s_v}^T \mathbf{M}_{o_{s_v}} \dot{\bar{\mathbf{G}}}_{v, s_v} + \bar{\mathbf{G}}_{v, s_v}^T \mathbf{C}_{o_{s_v}} \bar{\mathbf{G}}_{v, s_v} \right) \dot{\mathbf{q}}_v + \bar{\mathbf{G}}_{v, s_v}^T \mathbf{g}_{o_{s_v}}. \quad (8)$$

Then, by substituting (8) in (1), we obtain:

$$\bar{\mathbf{B}}_{v, s_v}(\mathbf{q}_v) \ddot{\mathbf{q}}_v + \bar{\mathbf{N}}_{v, s_v}(\mathbf{q}_v, \dot{\mathbf{q}}_v) \dot{\mathbf{q}}_v + \bar{\mathbf{g}}_{v, s_v}(\mathbf{q}_v) = \boldsymbol{\tau}_v, \quad (9)$$

i.e., the coupled dynamics of agent v and object s_v .

Next, we consider the Lyapunov function $V : \mathbb{R}^n \times \mathbb{R}^n \rightarrow \mathbb{R}_{\geq 0}$, with $V(\tilde{\mathbf{q}}, \dot{\tilde{\mathbf{q}}}) = \varphi(\tilde{\mathbf{q}}) + \sum_{z \in \mathcal{Z}} \frac{1}{2} \dot{\mathbf{q}}_z^T \mathbf{B}_z(\mathbf{q}_z) \dot{\mathbf{q}}_z + \sum_{v \in \mathcal{V}} \frac{1}{2} \dot{\mathbf{q}}_v^T \bar{\mathbf{B}}_{v, s_v}(\mathbf{q}_v) \dot{\mathbf{q}}_v$. Note that, since no collisions occur at $t = 0$ and $\dot{\mathbf{q}}_i(0) = \mathbf{0}, \forall i \in \mathcal{N}$, we conclude from (5) that $V_0 = V(\tilde{\mathbf{q}}(0), \dot{\tilde{\mathbf{q}}}(0)) < 1$. By differentiating V with respect to time, and substituting (1) and (9), we obtain:

$$\begin{aligned} \dot{V} = & \sum_{z \in \mathcal{Z}} \{ (\nabla_{\mathbf{q}_z} \varphi)^T \dot{\mathbf{q}}_z + \dot{\mathbf{q}}_z^T (\boldsymbol{\tau}_z - \mathbf{N}_z \dot{\mathbf{q}}_z - \mathbf{g}_z) + \frac{1}{2} \dot{\mathbf{q}}_z^T \dot{\mathbf{B}}_z \dot{\mathbf{q}}_z \} \\ & + \sum_{v \in \mathcal{V}} \{ (\nabla_{\mathbf{q}_v} \varphi)^T \dot{\mathbf{q}}_v + \dot{\mathbf{q}}_v^T (\boldsymbol{\tau}_v - \bar{\mathbf{N}}_{v, s_v} \dot{\mathbf{q}}_v - \bar{\mathbf{g}}_{v, s_v}) + \frac{1}{2} \dot{\mathbf{q}}_v^T \dot{\bar{\mathbf{B}}}_{v, s_v} \dot{\mathbf{q}}_v \}, \end{aligned}$$

where we have also used the fact that $\mathbf{f}_z = \mathbf{0}, \forall z \in \mathcal{Z}$, since the agents performing transportation actions are not in contact with any objects or other agents. By employing (4), (6), as well as Proposition 1, \dot{V} becomes:

$$\dot{V} = - \sum_{i \in \mathcal{Z} \cup \mathcal{V}} \dot{\mathbf{q}}_i^T \mathbf{K}_i \dot{\mathbf{q}}_i,$$

which is strictly negative unless $\dot{\mathbf{q}}_i = \mathbf{0}, \forall i \in \{z, v\}, z \in \mathcal{Z}, v \in \mathcal{V}$. Hence, $V(\tilde{\mathbf{q}}(t), \dot{\tilde{\mathbf{q}}}(t)) \leq V_0 < 1 \Rightarrow \varphi(\tilde{\mathbf{q}}(t)) < 1, \forall t \in \mathbb{R}_{\geq 0}$, which implies that collisions, undesired regions and singularities are avoided. Moreover, according to La Salle’s Invariance Principle (Khalil, 2002), the system will converge to the largest invariant set contained in $\{\tilde{\mathbf{q}}, \dot{\tilde{\mathbf{q}}}, \text{s.t. } \dot{\tilde{\mathbf{q}}} = \mathbf{0}\}$. In order for this set to be invariant, we require that $\dot{\tilde{\mathbf{q}}} = \mathbf{0}$, which, by employing (6) and the dynamics (1), (9), implies that $\nabla_{\mathbf{q}_i} \varphi = \mathbf{0}, \forall i \in \{z, v\}, z \in \mathcal{Z}, v \in \mathcal{V}$. Since φ is a navigation function (Rimon and Koditschek, 1992), the condition $\nabla_{\mathbf{q}_i} \varphi = \mathbf{0}$ is true only at the destination configuration and a set of isolated saddle points. By choosing κ sufficiently large, the region of attraction of the saddle points is a set of measure zero (Rimon and Koditschek, 1992). Thus, the system converges to the destination configuration from almost everywhere, i.e., $\|\mathbf{p}_z(\mathbf{q}_z) - \pi_{k'_z}\| \rightarrow 0$ and $\|\mathbf{k}_{v, s_v}(\mathbf{q}_v) - \mathbf{p}_{\pi_{k'_v}}\| \rightarrow 0$. Therefore, in view of Assumption 1, there exist finite time instants $t_{f_z}, t_{f_v} > t_0, \forall z \in \mathcal{Z}, v \in \mathcal{V}$, such that $\mathcal{A}_z(\mathbf{q}_z(t_{f_z})) \in \pi_{k'_z}$ and $\mathcal{A}_v(\mathbf{q}_v(t_{f_v})), \mathcal{O}_{s_v}(\mathbf{x}_{o_{s_v}}(t_{f_v})) \in \pi_{k'_v}$, with inter-agent collision and singularity avoidance. Thus,

$\pi_{k_z} \rightarrow_z \pi_{k'_z}$ and $\pi_{k_v} \xrightarrow{T}_{v,s_v} \pi_{k'_v}$ according to Def. 3 and 5, respectively, which completes the proof.

Remark 1. During the transitions $\pi_{z_k} \rightarrow_z \pi_{k'_z}, z \in \mathcal{Z}$, once agent z leaves π_{k_z} , there is no guarantee that it will not enter it again until it reaches $\pi_{k'_z}$. The same holds for $\pi_v \xrightarrow{T}_{v,s_v} \pi_{v'}$, $v \in \mathcal{V}$, as well. For that reason, we can modify (5) to include continuous switchings to a navigation controllers that avoid π_{k_z} (or π_{k_v}), once agent z (or v) is out of it, as in (Guo and Dimarogonas, 2015).

Considering the agents $g \in \mathcal{G}, q \in \mathcal{Q}$ that perform grasp and release actions, note that there exist positive and finite time instants $t_{f_g}, t_{f_q} > t_0$ that these actions will be completed, $\forall g \in \mathcal{G}, q \in \mathcal{Q}$. We define $\bar{t}_f = \max\{\max_{g \in \mathcal{G}}\{t_{f_g}\}, \max_{q \in \mathcal{Q}}\{t_{f_q}\}, \max \mathbb{S}\}$, where $\mathbb{S} = \{t \geq t_0 \text{ s.t. } \mathcal{A}_z(\mathbf{q}_z(t)) \in \pi_{k'_z}, \mathcal{A}_v(\mathbf{q}_v(t)), \mathcal{O}_{s_v}(\mathbf{x}_{O_{s_v}}(t)) \in \pi_{k'_v}, \forall z \in \mathcal{Z}, v \in \mathcal{V}\}$, which represents a time instant that all the agents $i \in \mathcal{N}$ will have completed their respective action. Therefore, by choosing $t'_0 > \bar{t}_f$, we can define a new set of actions to be executed by the agents, starting at t'_0 (i.e., the conditions of Def. 3-5 hold at t'_0 instead of t_0). In this way, we add a notion of synchronization to our system, since each (non-idle) agent, after completing an action, will wait for all other agents to complete their own, so that they start the next set of actions at the same time.

4.2 High-Level Plan Generation

The second part of the solution is the derivation of a high-level plan that satisfies the given LTL formulas ϕ_i and ϕ_{o_j} and can be generated by using standard techniques from automata-based formal verification methodologies. Thanks to (i) the proposed control laws that allow agent transitions and object transportations $\pi_k \rightarrow_i \pi_{k'}$ and $\pi_k \xrightarrow{T}_{i,j} \pi_{k'}$, respectively, (ii) the off-the-self control laws that guarantee grasp and release actions $i \xrightarrow{g} j$ and $i \xrightarrow{r} j$, respectively, and (iii) the formulation for the synchronization of actions, we can abstract the behavior of the agents using a finite transition system as presented in the sequel.

Definition 7. The coupled behavior of the overall system of all the N agents and M objects is modeled by the transition system $\mathcal{TS} = (\Pi_s, \Pi_s^{\text{init}}, \rightarrow_s, \mathcal{AG}, \Psi, \mathcal{L})$, where

(i) $\Pi_s \subset \bar{\Pi} \times \bar{\Pi}_O \times \bar{\mathcal{AG}}$ is the set of states; $\bar{\Pi} = \Pi_1 \times \dots \times \Pi_N$ and $\bar{\Pi}_O = \Pi_{O_1} \times \dots \times \Pi_{O_M}$ are the set of states-regions that the agents and the objects can be at, with $\Pi_i = \Pi_{O_j} = \Pi, \forall i \in \mathcal{N}, j \in \mathcal{M}$; $\mathcal{AG} = \mathcal{AG}_1 \times \dots \times \mathcal{AG}_N$ is the set of boolean grasping variables introduced in Section 3.1, with $\mathcal{AG}_i = \{\mathcal{AG}_{i,0}\} \cup \{\mathcal{AG}_{i,j}\}_{j \in \mathcal{M}}, \forall i \in \mathcal{N}$. By denoting $\bar{\pi} = (\pi_{k_1}, \dots, \pi_{k_N}), \bar{\pi}_O = (\pi_{k_{O_1}}, \dots, \pi_{k_{O_M}}), \bar{w} = (w_1, \dots, w_N)$, with $\pi_{k_i}, \pi_{k_{O_j}} \in \Pi$ (i.e., $k_i, k_{O_j} \in \mathcal{K}, \forall i \in \mathcal{N}, j \in \mathcal{M}$) and $w_i \in \mathcal{AG}_i, \forall i \in \mathcal{N}$, then $\pi_s = (\bar{\pi}, \bar{\pi}_O, \bar{w}) \in \Pi_s$ iff $\pi_{k_i} \neq \pi_{k_n}$ and $\pi_{k_{O_j}} \neq \pi_{k_{O_\ell}}, \forall i, n \in \mathcal{N}, j, \ell \in \mathcal{M}$, with $i \neq n$ and $j \neq \ell$, i.e., we consider that there cannot be more than one agent or more than one object at a time in each region of interest,

(ii) $\Pi_s^{\text{init}} \subset \Pi_s$ is the initial set of states at $t = 0$, which, owing to (i), satisfies the conditions of Problem 1,

(iii) $\rightarrow_s \subset \Pi_s \times \Pi_s$ is a transition relation defined as follows: given the states $\pi_s, \pi'_s \in \Pi_s$, with

$$\begin{aligned} \pi_s &= (\bar{\pi}, \bar{\pi}_O, \bar{w}) = (\pi_{k_1}, \dots, \pi_{k_N}, \pi_{k_{O_1}}, \dots, \pi_{k_{O_M}}, w_1, \dots, w_N), \\ \pi'_s &= (\bar{\pi}', \bar{\pi}'_O, \bar{w}') = (\pi_{k'_1}, \dots, \pi_{k'_N}, \pi_{k'_{O_1}}, \dots, \pi_{k'_{O_M}}, w'_1, \dots, w'_N), \end{aligned} \quad (10)$$

a transition $\pi_s \rightarrow_s \pi'_s$ occurs iff there exist disjoint sets $\mathcal{Z}, \mathcal{V}, \mathcal{G}, \mathcal{Q} \subseteq \mathcal{N}$ with $|\mathcal{V}| + |\mathcal{G}| + |\mathcal{Q}| \leq |\mathcal{M}|$ and $\mathcal{S} = \{[s_v]_{v \in \mathcal{V}}\}, \mathcal{X} = \{[x_g]_{g \in \mathcal{G}}\}, \mathcal{Y} = \{[y_q]_{q \in \mathcal{Q}}\} \subseteq \mathcal{M}$, such that:

- (1) $w_z = w'_z = \mathcal{AG}_{z,0} = \top$ and $\pi_{k_z} \rightarrow_z \pi_{k'_z}, \forall z \in \mathcal{Z}$,
- (2) $\pi_{k_v} = \pi_{k_{O_{s_v}}}, \pi_{k'_v} = \pi_{k'_{O_{s_v}}}, w_v = w'_v = \mathcal{AG}_{v,s_v} = \top$ and $\pi_{k_v} \xrightarrow{T}_{v,s_v} \pi_{k'_v}, s_v \in \mathcal{S}, \forall v \in \mathcal{V}$.
- (3) $\pi_{k_g} = \pi_{k'_g} = \pi_{k_{O_{x_g}}} = \pi_{k'_{O_{x_g}}}, w_g = \mathcal{AG}_{g,0} = \top, w'_g = \mathcal{AG}_{g,x_g} = \top$ and $g \xrightarrow{g} x_g, x_g \in \mathcal{X}, \forall g \in \mathcal{G}$,
- (4) $\pi_{k_q} = \pi_{k'_q} = \pi_{k_{O_{y_q}}} = \pi_{k'_{O_{y_q}}}, w_q = \mathcal{AG}_{q,y_q} = \top, w'_q = \mathcal{AG}_{q,0} = \top$ and $q \xrightarrow{r} y_q, y_q \in \mathcal{Y}, \forall q \in \mathcal{Q}$,

(iv) $\Psi = \bar{\Psi} \cup \bar{\Psi}_O$ with $\bar{\Psi} = \bigcup_{i \in \mathcal{N}} \Psi_i$ and $\bar{\Psi}_O = \bigcup_{j \in \mathcal{M}} \Psi_{O_j}$, are the atomic propositions of the agents and objects, respectively, as defined in Section 3,

(v) $\mathcal{L} : \Pi_s \rightarrow 2^\Psi$ is a labeling function defined as follows: Given a state π_s as in (10) and $\psi = \bigcup_{i \in \mathcal{N}} \psi_i \bigcup_{j \in \mathcal{M}} \psi_{O_j}$ with $\psi_i \in 2^{\Psi_i}, \psi_{O_j} \in 2^{\Psi_{O_j}}$, then $\psi \in \mathcal{L}(\pi_s)$ if and only if $\psi_i \in \mathcal{L}_i(\pi_{k_i})$ and $\psi_{O_j} \in \mathcal{L}_{O_j}(\pi_{k_{O_j}}), \forall i \in \mathcal{N}, j \in \mathcal{M}$.

Broadly speaking, the cases (1)-(4) in the transition relation of Def. 7 correspond to agent transition, object transportation, grasp and release actions, respectively. More specifically, the agents $z \in \mathcal{Z}$ perform transitions between $\pi_{k_z}, \pi_{k'_z}$, the agents $v \in \mathcal{V}$ perform transportation of the objects $s_v \in \mathcal{S}$ from π_{k_v} to $\pi_{k'_v}$, and the agents $g \in \mathcal{G}, q \in \mathcal{Q}$ perform grasping and releasing actions with objects $x_g \in \mathcal{X}$ and $y_q \in \mathcal{Y}$, respectively.

Next, we form the global LTL formula $\phi = (\bigwedge_{i \in \mathcal{N}} \phi_i) \wedge (\bigwedge_{j \in \mathcal{M}} \phi_{O_j})$ over the set Ψ . Then, we translate ϕ to a Buchi Automaton \mathcal{BA} and we build the product $\widetilde{\mathcal{TS}} = \mathcal{TS} \times \mathcal{BA}$. The accepting runs of $\widetilde{\mathcal{TS}}$ satisfy ϕ and are directly projected to a sequence of desired states to be visited in \mathcal{TS} . Although the semantics of LTL are defined over infinite sequences of services, it can be proven that there always exists a high-level plan that takes the form of a finite state sequence followed by an infinite repetition of another finite state sequence. For more details on the followed technique, the reader is referred to the related literature, e.g., (Baier et al., 2008).

Following the aforementioned methodology, we obtain a high-level plan as sequences of states and atomic propositions $p = \pi_s^1 \pi_s^2 \dots$ and $\psi = \psi^1 \psi^2 \dots$, with $\pi_s^m = (\bar{\pi}^m, \bar{\pi}_O^m, \bar{w}^m) \in \Pi_s, \psi^m \in 2^\Psi, \psi^m \in \mathcal{L}(\pi_s^m), \forall m \in \mathbb{N}$, and $\psi \models \phi$. The path p is then projected to individual sequences of regions $\pi_{k_{O_j}^1} \pi_{k_{O_j}^2} \dots$ with $\pi_{k_{O_j}^m} \in \Pi, \forall m \in \mathbb{N}, \pi_{k_i^1} \pi_{k_i^2} \dots$ with $\pi_{k_i^m} \in \Pi, \forall m \in \mathbb{N}$, and boolean grasping variables $w_i^1 w_i^2 \dots$ with $w_i^m \in \mathcal{AG}_i, \forall m \in \mathbb{N}, i \in \mathcal{N}, j \in \mathcal{M}$. The aforementioned sequences determine the behavior of agent $i \in \mathcal{N}$, i.e., the sequence of actions (transition, transportation, grasp, release or stay idle) it must take.

By the definition of \mathcal{L} in Def. 7, we obtain that $\psi_i^m \in \mathcal{L}_i(\pi_{k_i^m}), \psi_{O_j}^m \in \mathcal{L}_{O_j}(\pi_{k_{O_j}^m}), \forall i \in \mathcal{N}, j \in \mathcal{M}, m \in \mathbb{N}$.

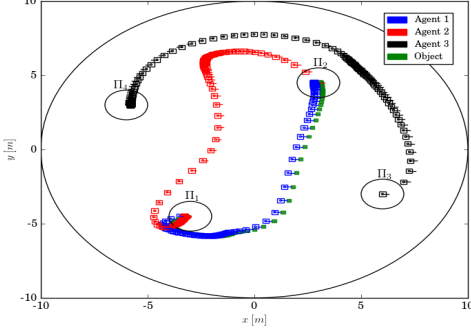


Fig. 2. The actions $\pi_1 \xrightarrow{T} \pi_2$, $\pi_2 \rightarrow \pi_1$ and $\pi_3 \rightarrow \pi_4$.

Therefore, since $\phi = (\bigwedge_{i \in \mathcal{N}} \phi_i) \wedge (\bigwedge_{j \in \mathcal{M}} \phi_{o_j})$ is satisfied by ψ , we conclude that $\psi_i = (\psi_i^1 \psi_i^2 \dots) \models \phi_i$ and $\psi_{o_j} = (\psi_{o_j}^1 \psi_{o_j}^2 \dots) \models \phi_{o_j}, \forall i \in \mathcal{N}, j \in \mathcal{M}$.

The sequence of the states $(\pi_{k_i^1} \pi_{k_i^2} \dots, \psi_i^1 \psi_i^2 \dots)$ and $(\pi_{k_{o_j}^1} \pi_{k_{o_j}^2} \dots, \psi_{o_j}^1 \psi_{o_j}^2 \dots)$ over $(\Pi, 2^{\Psi_i})$ and $(\Pi, 2^{\Psi_{o_j}})$, respectively, produces the trajectories $\mathbf{q}_i(t)$ and $\mathbf{x}_{o_j}(t), \forall i \in \mathcal{N}, j \in \mathcal{M}$. The corresponding behaviors are $\beta_i = (\mathbf{q}_i(t), \sigma_i) = (\mathbf{q}_i(t_{i_1}), \sigma_{i_1})(\mathbf{q}_i(t_{i_2}), \sigma_{i_2}) \dots$ and $\beta_{o_j} = (\mathbf{x}_{o_j}(t), \sigma_{o_j}) = (\mathbf{x}_{o_j}(t_{o_j,1}), \sigma_{o_j,1})(\mathbf{x}_{o_j}(t_{o_j,2}), \sigma_{o_j,2}) \dots$, respectively, according to Section 3.2, with $\mathcal{A}_i(\mathbf{q}_i(t_{i_m})) \in \pi_{k_i^m}, \sigma_{i_m} \in \mathcal{L}_i(\pi_{k_i^m})$ and $\mathcal{O}_j(\mathbf{x}_{o_j}(t_{o_j,m})) \in \pi_{k_{o_j}^m}, \sigma_{o_j,m} \in \mathcal{L}_{o_j}(\pi_{k_{o_j}^m})$. Thus, it is guaranteed that $\sigma_i \models \phi_i, \sigma_{o_j} \models \phi_{o_j}$ and consequently, the behaviors β_i and β_{o_j} satisfy the formulas ϕ_i and ϕ_{o_j} , respectively, $\forall i \in \mathcal{N}, j \in \mathcal{M}$. The aforementioned reasoning is summarized as follows:

Theorem 2. The execution of the path (p, ψ) of \mathcal{TS} guarantees behaviors β_i, β_{o_j} that yield the satisfaction of ϕ_i and ϕ_{o_j} , respectively, $\forall i \in \mathcal{N}, j \in \mathcal{M}$, providing, therefore, a solution to Problem 1.

Remark 2. Note that although the overall set of states of \mathcal{TS} increases exponentially with respect to the number of agents/objects/regions (the maximum number of states is $K^{N+M}(M+1)^N$), some states are either not reachable or simply removed due to the constraints set of Def. 7, reducing the state complexity.

5. SIMULATION RESULTS

Firstly, to demonstrate the efficiency of the continuous control laws (6), we consider a workspace with $\mathbf{p}_0 = [0, 0, 0]^T \text{m}, r_0 = 10 \text{m}$, with $K = 4$ regions, $\mathbf{p}_{\pi_1} = [-4, -4.5, 0.2]^T \text{m}, \mathbf{p}_{\pi_2} = [4, 4.5, 0.2]^T \text{m}, \mathbf{p}_{\pi_3} = [6, -4, 0.2]^T \text{m}, \mathbf{p}_{\pi_4} = [-6, 4, 0.2]^T \text{m}, r_{\pi_1} = r_{\pi_2} = r_{\pi_3} = r_{\pi_4} = 1 \text{m}, M = 1$ object and $N = 3$ of agents. The object is a rigid cube of dimensions $0.1 \times 0.1 \times 0.1 \text{m}^3$ and each agent consists of a cubic mobile base of dimensions $0.3 \times 0.3 \times 0.3 \text{m}^3$, able to move on the $x-y$ plane, and two rigid rectangular links of dimensions $0.05 \times 0.05 \times 0.3 \text{m}^3$ connected by a cylindrical joint rotating around the negative y -axis. The generalized variables for each agent are taken as $\mathbf{q}_i = [x_{c_i}, y_{c_i}, \theta_i]^T \in \mathbb{R}^3, i \in \{1, 2, 3\}$, where $[x_{c_i}, y_{c_i}]^T$ is the base's center of mass and θ_i is the joint's angle. The object's and each agent's volume are approximated by a total of 1 and 6 spheres, respectively. The initial

conditions are taken such that $\mathcal{A}_1(\mathbf{q}_1(0)), \mathcal{O}_1(\mathbf{x}_{o_1}(0)) \in \pi_1, \mathcal{A}_2(\mathbf{q}_2(0)) \in \pi_2, \mathcal{A}_3(\mathbf{q}_3(0)) \in \pi_3$ and $\mathcal{AG}_{1,1}(0) = \top$. We perform a simulation of the actions $\pi_1 \xrightarrow{T} \pi_2, \pi_2 \rightarrow \pi_1$ and $\pi_3 \rightarrow \pi_4$, using (6), with $\mathcal{Z} = \{2, 3\}, \mathcal{V} = \{1\}, \kappa = 7, k_1 = k_2 = k_3 = 30, d_1 = d_2 = d_3 = 10$. The result is depicted in Fig. 2, where the agents perform successfully their actions, without colliding with each other.

Next, to demonstrate the overall hybrid control protocol, we consider a simplified scenario involving $N = 2$ of the aforementioned agents, $M = 1$ object in a workspace with $\mathbf{p}_0 = [0, 0, 0]^T \text{m}, r_0 = 6 \text{m}$, and $K = 2$ regions of interest π_1, π_2 , with $\mathbf{p}_{\pi_1} = [-2, -3, 0.2]^T \text{m}, \mathbf{p}_{\pi_2} = [2, 3, 0.2]^T \text{m}, r_{\pi_1} = r_{\pi_2} = 1 \text{m}$. The initial conditions are taken such that $\mathcal{A}_1(\mathbf{q}_1(0)), \mathcal{O}_1(\mathbf{x}_{o_1}(0)) \in \pi_1, \mathcal{A}_2(\mathbf{q}_2(0)) \in \pi_2$ and $\Omega^{1,*}(\mathbf{q}_1(0)) \cap \Omega^{1,*}(\mathbf{x}_{o_1}(0)) = \emptyset$.

The resulting \mathcal{TS} is pictured in Fig. 3, where we show each state π_s^m in the form $(\pi_{k_1^m}, \pi_{k_2^m}, \pi_{k_{o_1}^m}, \mathcal{AG}_{1,j}, \mathcal{AG}_{2,j})$, as depicted with thick blue color in the figure, with $j \in \{0, 1\}$. The initial state is $\Pi_s^{\text{init}} = (\pi_{k_1^1}, \pi_{k_2^1}, \pi_{k_{o_1}^1}, w_1^1, w_2^1) = (\pi_1, \pi_2, \pi_1, \mathcal{AG}_{1,0}, \mathcal{AG}_{2,0})$ (depicted with green color in the figure). Note that, due to our restriction that no more than one agent is allowed to in the same region, the number of states is reduced from $K^{N+M}(M+1)^N = 32$ to 16. Moreover, since an agent i cannot have a grasp with object j if $\pi_{k_i^m} \neq \pi_{k_{o_j}^m}, \forall m \in \mathbb{N}$, some states are not reachable (depicted with red in the figure), and thus the number of states is further reduced to 8. We also consider the atomic propositions $\Psi_1 = \{\text{"red"}, \text{"blue"}\}, \Psi_2 = \{\text{"green"}, \text{"yellow"}\}$ and $\Psi_{o_1} = \{\text{"Goal}_1\}, \text{"Goal}_2\}$, with $\mathcal{L}_1(\pi_1) = \{\text{"red"}\}, \mathcal{L}_1(\pi_2) = \{\text{"blue"}\}, \mathcal{L}_2(\pi_1) = \{\text{"green"}\}, \mathcal{L}_2(\pi_2) = \{\text{"yellow"}\}$, and $\mathcal{L}_{o_1}(\pi_1) = \{\text{"Goal}_1\}, \mathcal{L}_{o_1}(\pi_2) = \{\text{"Goal}_2\}$. The formulas to be satisfied by the agents and the object are the following: $\phi_1 = \square \diamond (\text{"red"} \wedge \diamond \text{"blue"}), \phi_2 = \square \diamond (\text{"green"} \wedge \diamond \text{"yellow"})$ and $\phi_{o_1} = \square \diamond (\text{"Goal}_1" \wedge \diamond \text{"Goal}_2")$. By following the procedure described in Section 4.2, we obtain a path satisfying $\phi = \phi_1 \wedge \phi_2 \wedge \phi_{o_1}$ as $\pi_s^1 \pi_s^2 (\pi_s^7 \pi_s^8 \pi_s^4 \pi_s^3 \pi_s^6 \pi_s^5 \pi_s^1 \pi_s^2)^\omega$, which includes transitions, grasping/releasing as well as transportation actions from both agents. Fig. 4 depicts two indicative transitions, namely, $\pi_s^2 \rightarrow_s \pi_s^7$ and $\pi_s^8 \rightarrow_s \pi_s^4$.

6. CONCLUSION

We have presented a novel hybrid control framework for the motion planning of a system comprising of N agents and M objects. Future works will address decentralization of the framework as well as cooperative transportation of the objects by agents with limited sensing information.

REFERENCES

- Baier, C., Katoen, J.P., and Larsen, K.G. (2008). *Principles of model checking*. MIT press.
- Belta, C., Isler, V., and Pappas, G.J. (2005). Discrete abstractions for robot motion planning and control in polygonal environments. *IEEE Transactions on Robotics*, 21(5), 864–874.
- Bhatia, A., Kavvaki, L.E., and Vardi, M.Y. (2010). Sampling-based motion planning with temporal goals. *IEEE International Conference on Robotics and Automation (ICRA)*, 2689–2696.

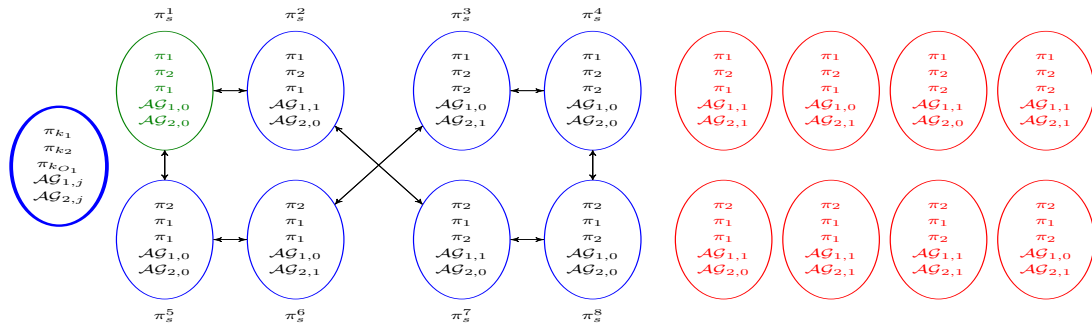


Fig. 3. The transition system \mathcal{TS} . The information in each state is depicted according to the state with thick blue color. The initial state is colored with green whereas the red states are not reachable.

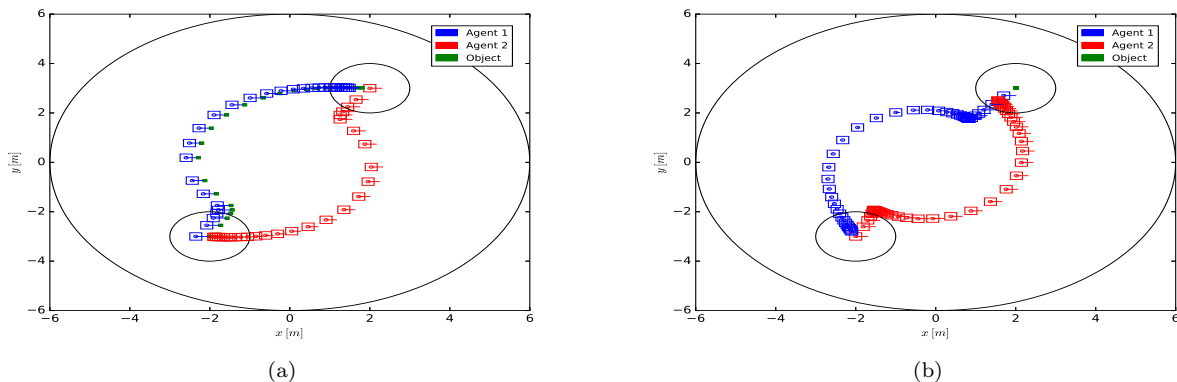


Fig. 4. The transitions $\pi_s^2 \rightarrow_s \pi_s^7$ and $\pi_s^8 \rightarrow_s \pi_s^4$ in (a) and (b), respectively.

Bhatia, A., Maly, M.R., Kavragi, L.E., and Vardi, M.Y. (2011). Motion planning with complex goals. *IEEE Robotics & Automation Magazine*, 18(3), 55–64.

Chen, Y., Ding, X.C., Stefanescu, A., and Belta, C. (2012). Formal approach to the deployment of distributed robotic teams. *IEEE Transactions on Robotics*, 28(1), 158–171.

Cowlagi, R.V. and Zhang, Z. (2016). Motion-planning with linear temporal logic specifications for a nonholonomic vehicle kinematic model. *IEEE American Control Conference (ACC)*, 6411–6416.

Cutkosky, M.R. (2012). *Robotic grasping and fine manipulation*, volume 6. Springer Science & Business Media.

Diaz-Mercado, Y., Jones, A., Belta, C., and Egerstedt, M. (2015). Correct-by-construction control synthesis for multi-robot mixing. *IEEE Conference on Decision and Control (CDC)*, 221–226.

Fainekos, G.E., Girard, A., Kress-Gazit, H., and Pappas, G.J. (2009). Temporal logic motion planning for dynamic robots. *Automatica*, 45(2), 343–352.

Filippidis, I., Dimarogonas, D.V., and Kyriakopoulos, K.J. (2012). Decentralized multi-agent control from local ltl specifications. *IEEE Conference on Decision and Control (CDC)*, 6235–6240.

Guo, M. and Dimarogonas, D.V. (2015). Multi-agent plan reconfiguration under local ltl specifications. *The International Journal of Robotics Research*, 34(2), 218–235.

Khalil, H.K. (2002). *Nonlinear systems*. Prentice Hall.

Lahijanjan, M., Maly, M.R., Fried, D., Kavragi, L.E., Kress-Gazit, H., and Vardi, M.Y. (2016). Iterative tem-

poral planning in uncertain environments with partial satisfaction guarantees. *IEEE Transactions on Robotics*, 32(3), 583–599.

Loizou, S.G. and Kyriakopoulos, K.J. (2004). Automatic synthesis of multi-agent motion tasks based on ltl specifications. *IEEE Conference on Decision and Control (CDC)*, 1, 153–158.

Loizou, S.G. and Kyriakopoulos, K.J. (2006). A feedback-based multiagent navigation framework. *International Journal of Systems Science*, 37(6), 377–384.

Reis, M.F., Leite, A.C., and Lizarralde, F. (2015). Modeling and control of a multifingered robot hand for object grasping and manipulation tasks. *IEEE Conference on Decision and Control (CDC)*, 159–164.

Rimon, E. and Koditschek, D.E. (1992). Exact robot navigation using artificial potential functions. *IEEE Transactions on robotics and automation*, 8, 501–518.

Siciliano, B., Sciavicco, L., Villani, L., and Oriolo, G. (2010). *Robotics: modelling, planning and control*. Springer Science & Business Media.

Tanner, H.G., Loizou, S.G., and Kyriakopoulos, K.J. (2003). Nonholonomic navigation and control of cooperating mobile manipulators. *IEEE Transactions on Robotics and Automation*, 19(1), 53–64.